


■ SRT-EL – The economical rapid acting roller door

The „EL“ is suitable for all internally operating openings, which are frequently used by forklifts or by people. Further the new SRT-EL can also be installed in association with automatic conveyor systems or roller tracks. A special „crash“ version is available on request and in addition the door can be supplied in stainless steel e.g. for employment in hygiene areas. The space saving construction with its very narrow door columns makes the new SRT-EL multi-employable. A perfect and therefore very economical door system!



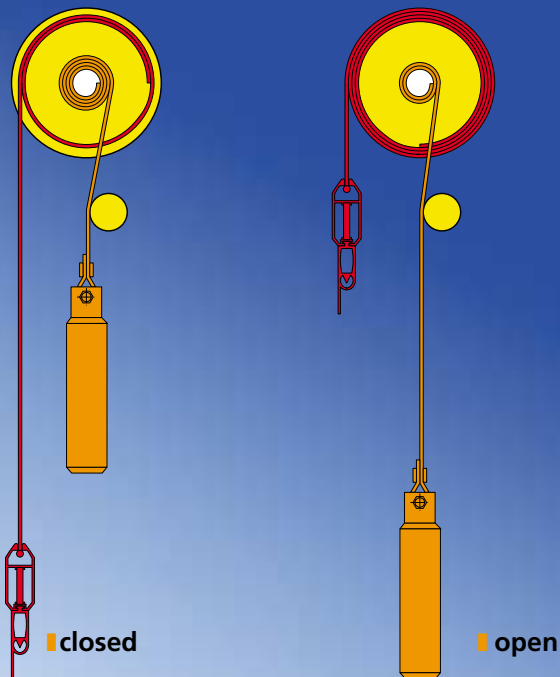

■ Counterbalance

The counter balancing in the completely new SRT-EL is provided through maintenance and wear free counterweights, which are integrated in the two side columns. The essential advantage in this being, that e.g. in the event of a power failure a rapid and simple (emergency) opening of the door is possible at any time. This merely requires the operation of the pullrope. This releases the brake and the door opens automatically. You can safely forget the time-wasting search for a ladder and crankhandle.

■ Absolute sealing

The standard door panel is made of fully transparent material and is provided with warning stripes as standard. It is likewise available with coloured curtains of various qualities (e.g. for foodstuffs areas). Unwanted air exchanges, e.g. through pressure differences or suction effects are avoided through lateral, door panel fixed running rollers. The use of these door panel guides ensures the optimum sealing and easy, precise running. The closing bar can only be pushed out of the guides in the „crash“ version. An accident prevention contact strip is standard.

■ Drive and control

A 400 V direct drive is employed as the drive source. The control is provided by means of a microprocessor controller, so that all the sensors can be connected for automatic operation. An integrated controller interface facilitates the installation e.g. to internal conveyor units. Therefore a flexible adaptation to all conceivable operational processes is possible at any time. A high frequency motor provides for a rapid and trouble free material flow, which together with the speed controller guarantees an opening speed of ca. 1.5 m/sec.



■ Space saving construction

Extensively pre-assembled units facilitate the installation, which can also be carried out by yourself. The self supporting guide angles are made from sendzimir galvanised steel which can also be supplied in stainless steel on request. To accommodate collisions without serious consequences a „crash“ version can be ordered. Special on-site preparations are not necessary thanks to the space saving construction e.g. with very narrow side columns. Therefore the SRT-EL is multi-employable. It offers a very economical solution with acceptably low investment costs.

■ More information: www.efaflex.com
 or simply send the fax response form: +49-(0)8765/82-100



■ SST
 high-speed spiral door



■ SST-ISO-K
 high-speed spiral door
 k-value = 0.5 W/m²K



■ STT
 high-speed turbo door



■ SRT
 high-speed roll-up door



■ SRT-EL
 high-speed roll-up door



■ SRT-EC
 high-speed roll-up door
 food and hygienic area



■ AS aluminium-high-speed folding door

■ AT high-speed alarm door



■ ES elastic high-speed folding door

Your EFAFLEX-Partner

Please send us information on:

- | | | |
|---|------------------------------------|---------------------------------|
| <input type="checkbox"/> The world of Doors | <input type="checkbox"/> SST-ISO-K | <input type="checkbox"/> STT |
| <input type="checkbox"/> SST | <input type="checkbox"/> SRT-EL | <input type="checkbox"/> SRT-EC |
| <input type="checkbox"/> SRT | <input type="checkbox"/> AT | <input type="checkbox"/> ES |
| <input type="checkbox"/> AS | | |

Name, First name _____

Company _____ Branch _____ Function _____

Street and number _____

Post code, town _____ Country _____

Telephone _____ Fax _____



EFAFLEX GmbH & Co. KG
 Fliederstraße 14 · D-84079 Bruckberg
 Telephone +49-(0)8765/82-0 · Fax +49-(0)8765/82-100
<http://www.efaflex.com>

■ SRT-EL High-Speed Roll-up Door

